

™ NUSSER - GROUP ™ NUSSER - GROUP





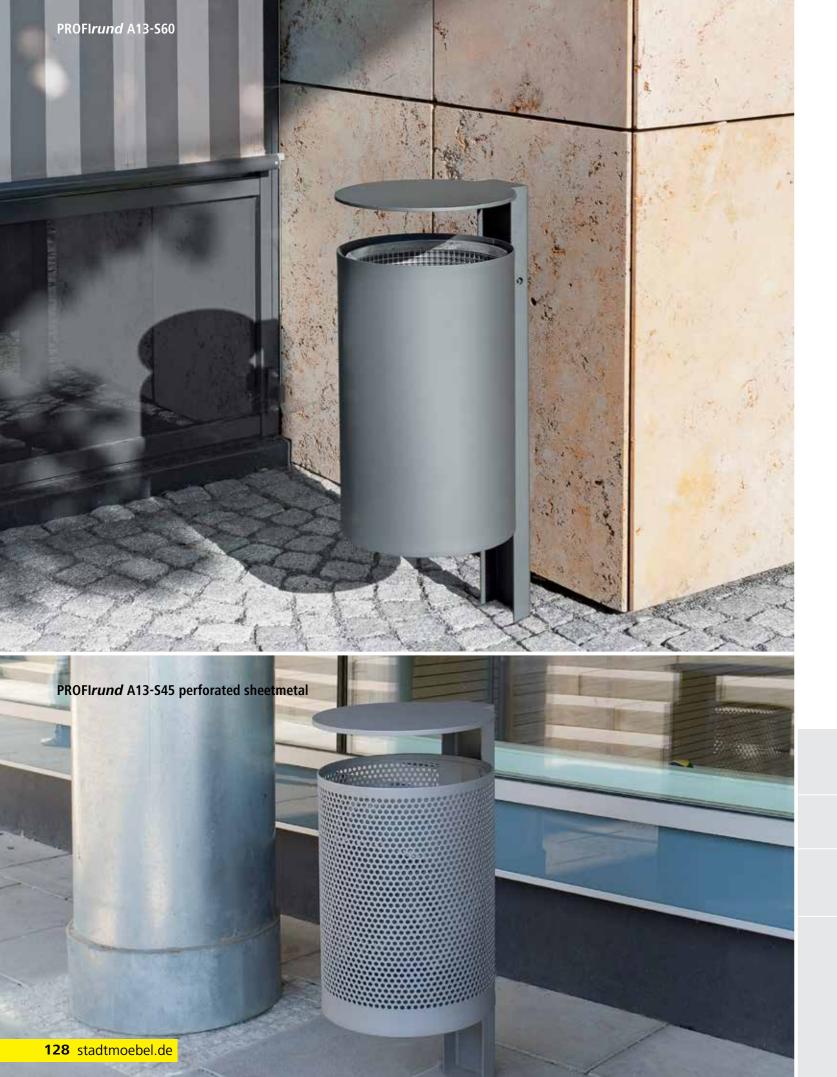



PROFIrund Series A13

BECK DODG

Round trash bin on U profile brace with flat roof. Trash bin for embedding in concrete or wall mounting, trash bin round, volume approx. 45 (60) I, diameter 340 mm, bin height 485 (585) mm, height grade approx. 820 (920) mm, round roof made of sheetmetal, bin locked with lock in the U profile brace; installed height min. 240 mm up to lower bin edge.

Technical description:

Choice of sheetmetal or perforated sheetmetal, hot-dip galvanized. Crimped bin edges.

Secured with 7 mm triangle lock. Weather-resistant, secured against unauthorized bin

Disposal in seconds: Disengage triangle lock — bin tilts forward. Remove and empty bin or insert (see option). Push bin into lock — done! removal and household trash deposits.

Function

Order No.	Version	Weight	Version	45 liters	60 liters
A13-S45	PROFIrund 45 I, roof, brace long	25 kg	Painted in RAL/DB	A13-S/W45R	A13-S/W60R
A13-S60	PROFIrund 60 I, roof, brace long	27 kg	PROFIrund bin made of perforated		
BP1	floor plate 200 x 200 mm welded		sheetmetal	A13-45LB	A13-60LB
A13-W45	PROFIrund 45 I, roof, wall mounting bro	acket 23 kg	Wire basket insert, round	DKR45	DKR60
A13-W60	PROFIrund 60 I, roof, wall mounting bro	acket 25 kg	Sheetmetal insert, round	BER45	BER60
MK1	Mast adapter + steel strap, 2 pcs.				

Version with integrated ashtray insert AS see page 139.